



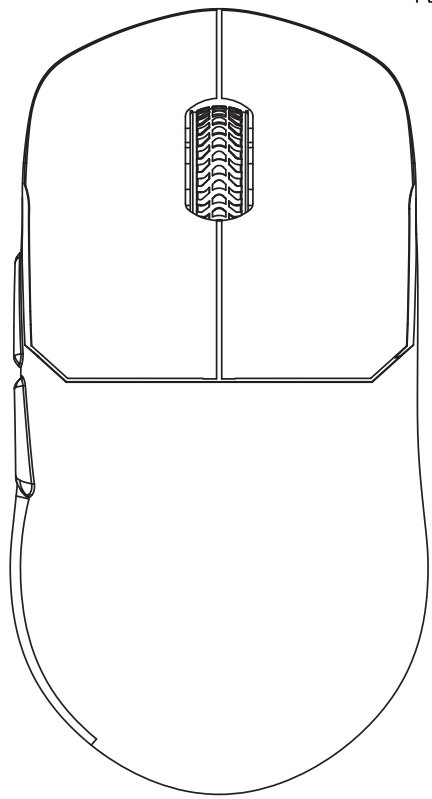


## G65 | WIRELESS GAMING MOUSE 使用说明书

### 鼠标功能介绍 (MOUSE FUNCTIONS)

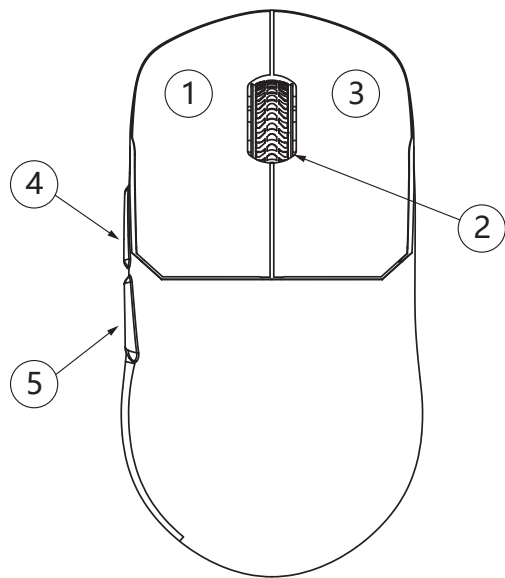

|             |                           |
|-------------|---------------------------|
| ① 左键        | Left                      |
| ② 中键(滚轮灯)   | Middle (the scroll light) |
| ③ 右键        | Right                     |
| ④ 前进键       | Forward                   |
| ⑤ 后退键       | Backward                  |
| ⑥ 分辨率 & 回报率 | DPI & Polling Rate        |
| ⑦ 指示灯       | Indicator light           |
| ⑧ TYPE-C端口  | TYPE - C port             |
| ⑨ 接收器舱盖     | Dongle cover              |

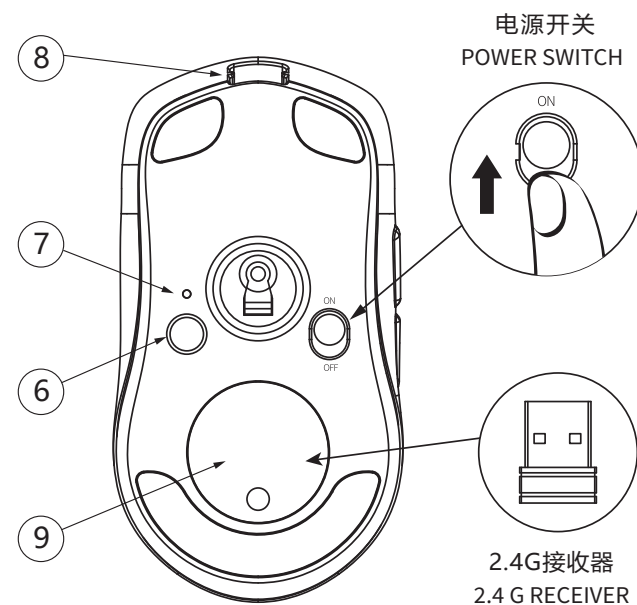

### DPI & Polling Rate:

- 以0.1秒为单位点击 ⑥ 时, 指示灯 ⑦ 颜色显示:  
Short Press :DPI Setup – 4 Steps(Default 800dpi)  
800dpi 1200dpi 1600dpi 2400dpi  
● ● ● ●
- 以1秒为单位点击 ⑥ 时, 指示灯 ⑦ 颜色显示:  
Long Press : Report Rate – 4 Steps(Default 1000Hz)  
125Hz 250Hz 500Hz 1000Hz  
● ● ● ●

轻按 ⑨ 可以取出2.4G接收器。

Press ⑨ to take out 2.4G receiver.

当使用无线模式时, 请把电源开关 ➡ ON。

When under wireless mode, please switch the power button to ON.

### 技术规格 (PRODUCT SPEC DATA)

- 型号: G65 游戏鼠标
- 分辨率: 19000dpi
- 按键数: 6键
- 按键寿命: 5000万次
- 线材长度: 1.6米
- 产品重量: 78g
- 鼠标尺寸: L122xW65xH39mm
- 5个可独立编程按键
- 2.4G/无线/有线TYPE-C 接口
- 系统支持: Windows XP/VISTA/7/8/10/Mac OS
- 颜色: 白色/黑色
- 追踪速度: 400ips
- 鼠标频率响应: 1000Hz
- 额定电压电流: 5V === 500mA
- 最大加速度: 50g

- MODEL NO. G65
- DPI UP TO 19000
- BUTTON 6 KEYS
- SWITCH LIFE 50 Million times
- CABLE 1.6M
- PRODUCT WEIGHE: 78g
- PRODUCT SIZE: L122xW65xH39mm
- 5 FULLY PROGRAMMABLE BUTTONS
- 2.4G/WIRELESS/TYPE-C interface
- SYSTEM SUPPORT: Windows XP/VISTA/7/8/10/Mac OS
- COLOR: WHITE/BLACK
- TRACKING SPEED: 400ips
- POLLING RATE: 1000Hz
- RATING: 5V === 500mA
- ACCELERATION: 50g

### 有线模式(Wired Mode):

- 插上USB线后自动切换到有线模式。  
Switch to wired mode automatically after plugging in USB cable.
- 拔掉USB线自动切换到无线模式(出厂默认为2.4G模式), 同时按住 ① 左键+ ② 中键+ ④ 前进键两秒进行蓝牙或2.4G模式循环切换。  
Switch to wireless mode automatically after unplugging USB cable, the defaulting setting is 2.4G, Hold the left ① middle ②, and forward ④ for 2 seconds to switch to BT / 2.4G mode.

### 2.4GHz Mode:

- 打开鼠标背部的电源开关; 从 ⑨ 处取出2.4G接收器并将之连入设备即可 (出厂已完成1对1配对)。  
Turn on the power switch on the back of the mouse; Remove the 2.4G dongle from ⑨ and connect it to the device (Factory 1 to 1 match).

- 如果需要重新配对接收器: 同时按住 ① 左键+ ② 中键+ ③ 右键三秒, 滚轮灯绿色快闪, 开始搜索接收器, 此时在距离鼠标10米范围内插入接收器, 对码成功后, 滚轮灯常亮1秒后熄灭。对码不成功60秒后滚轮灯熄灭, 鼠标进入休眠。

- If you need to re-pair the dongle: Hold the left ①, middle ②, and right ③ for 3 seconds. The scroll light will be flashing in green color and starts to search for the receiver/dongle, then pls plug the receiver/dongle

within 10m away from the mouse. The scroll light will be on for 1 second and then off if pairing successfully, The indicator will turn off in 60 seconds if pairing unsuccessfully and the mouse goes to sleep .

### 蓝牙模式(Bluetooth Mode):

打开鼠标背部的电源开关; 鼠标切换到蓝牙模式, 同时按住 ① 左键+ ② 中键+ ③ 右键三秒, 滚轮灯根据当前蓝牙通道对应颜色快闪提示, 蓝牙开始广播, 点击设备上相应蓝牙名称连接成功后, 滚轮灯常亮1秒后熄灭。连接不成功60秒后指示灯熄灭, 鼠标进入休眠。

Turn on the power switch on the back of the mouse; Switch to BT mode after connection, and hold the left ①, middle ②, and right ③ for 3S. The scroll light will be flashing prompt according to the current BT channel color, BT starts searching. Click the corresponding BT name on the device and the scroll light will be on for 1 second and then off. The scroll light will be off in 60S if the connection fails, and then the mouse goes to sleep.

以下组合键进行蓝牙设备1.2.3循环切换, 滚轮灯显示不同颜色代表当前设备:

The combination key switch corresponds to the BT device as follows:

- 同时按住右键 ③ + 前进键 ④ 1秒切换到蓝牙1, 滚轮灯显示蓝光。
- 同时按住右键 ③ + 后退键 ⑤ 1秒切换到蓝牙2, 滚轮灯显示浅蓝。
- 同时按住右键 ③ + 前进键 ④ + 后退键 ⑤ 1秒切换到蓝牙3, 滚轮灯显示冰蓝。

- Switch to BT 1 while holding down the right ③ + Forward ④ key for 1 second, The scroll light shows blue.
- Switch to BT 2 while holding down the right ③ + Backward ⑤ key for 1 second, The scroll light shows light blue.
- Switch to BT 3 while holding down the right ③ + Forward ④ + Backward ⑤ key for 1 second, The scroll light shows Sky blue.

### 提示 (TIPS):

- 2.4G和蓝牙模式切换成功后带记忆功能, 即在蓝牙模式下关闭电池开关后, 再打开一样是蓝牙模式 (同时记忆关闭前所连接的蓝牙设备1.2.3)。
- 回连时为滚轮灯慢闪, 失败后, 同样也是60秒后熄灭, 鼠标进入休眠。

The scroll light will flash slowly while reconnecting. if reconnection is failure, it will also be off after 60 seconds, and the mouse will go to sleep.

### 充电功能介绍 (Charging Function):

- 当插上USB线可使鼠标充电, 充电时滚轮灯 ② 红灯常亮, 充满后熄灭。  
The mouse can be charged when the USB cable is plugged in, and the scroll light ② is always red when charging, and goes out when it is full.
- 当电池电压低3.3V时滚轮灯 ② 红色快闪进行低电压报警, 停止操作鼠标3秒后停止闪烁, 提示请尽快充电。

When the battery voltage is lower than 3.3V, the scroll light ② will be blinking in red color for low voltage alarm. Stop operating the mouse for 3 seconds and the blinking stops, which prompts pls charge as soon as possible.

制造商: 东莞市腹灵竞技电子有限公司  
地址: 广东省东莞市石龙镇王屋洲工业区B栋  
Manufacturer: DONGGUAN FL ESPORTS ELECTRONICS CO.,LTD.  
Address: Building B,Wangwuzhou Industrial Zone,Shilong Town, Dongguan City,Guangdong,China.

产品执行标准: GB/T 26245-2010  
(温馨提示: 本产品外观、性能和详细规格可能因操作环境及要求更新, 恕不另行通知)  
Executive Standard of product: GB/T 26245-2010  
Warm Tips: The product appearance, performance and detailed specifications may be updated without prior notice depending on operational environment or other special requirement.



Official Website