


WIN 模式

Geo 65: 2.4G&有线&蓝牙 三模版

FL·CMMK

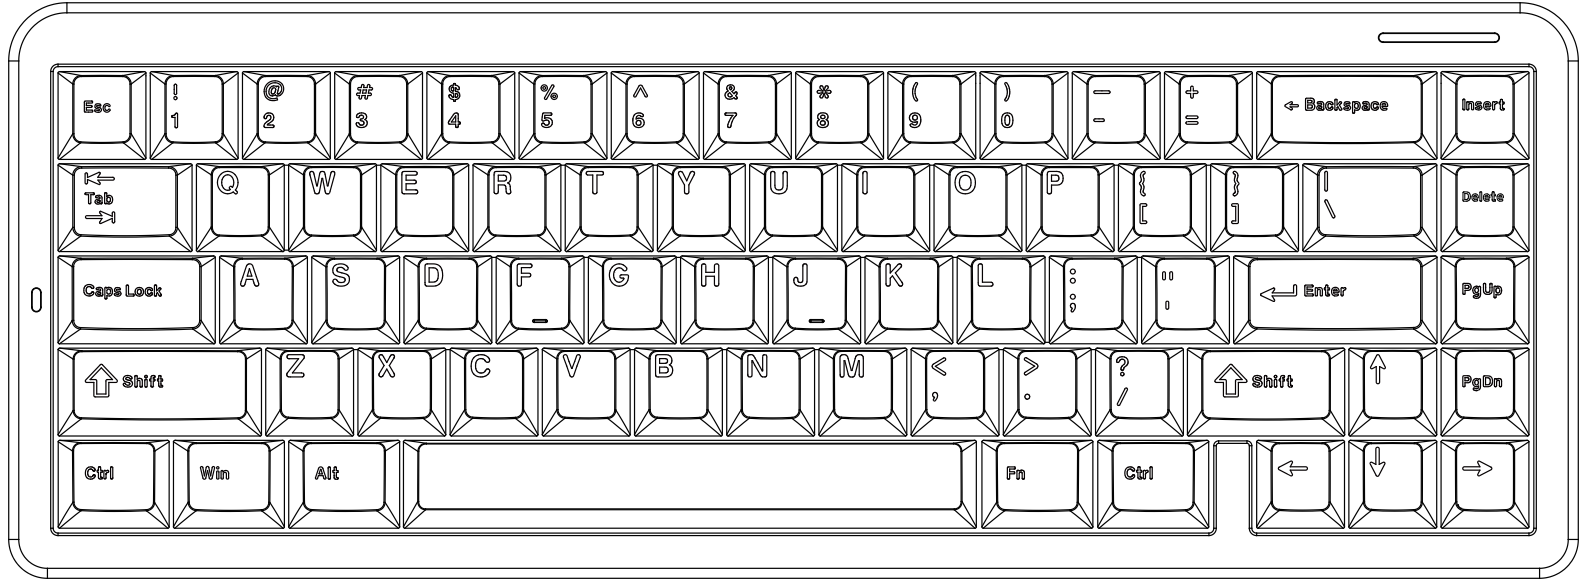


*妙用小技巧：可通过左侧Caps Lock底部拨动开关，快速进行2.4G/有线/蓝牙 模式切换。

*以上键帽字符和图案仅供参考，请以实物为准。

MAC 模式

Geo 65: 2.4G&有线&蓝牙 三模版

FL·CMMK

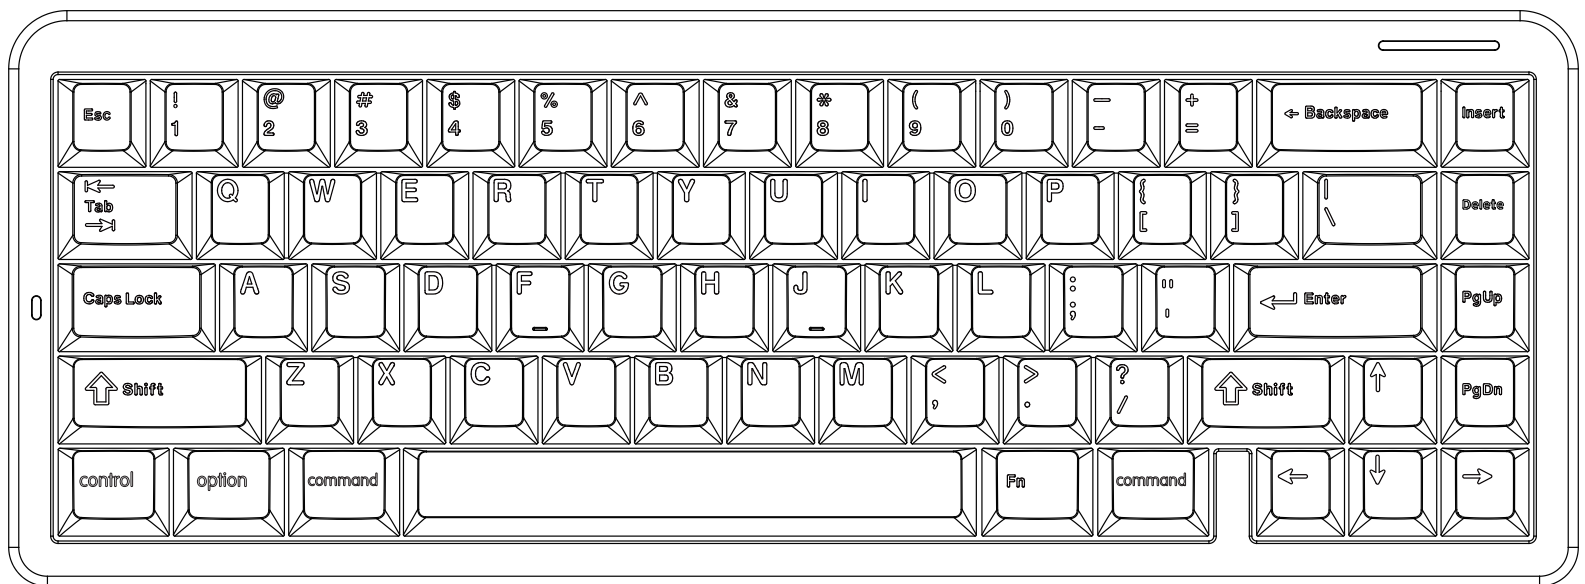


*妙用小技巧：可通过组合键（FN+L-ALT）进行MAC/WIN系统切换。

*以上键帽字符和图案仅供参考，请以实物为准。

Better for WIN

Geo65: 2.4G&WIRED&BT THREE MODE

FL·CMMK

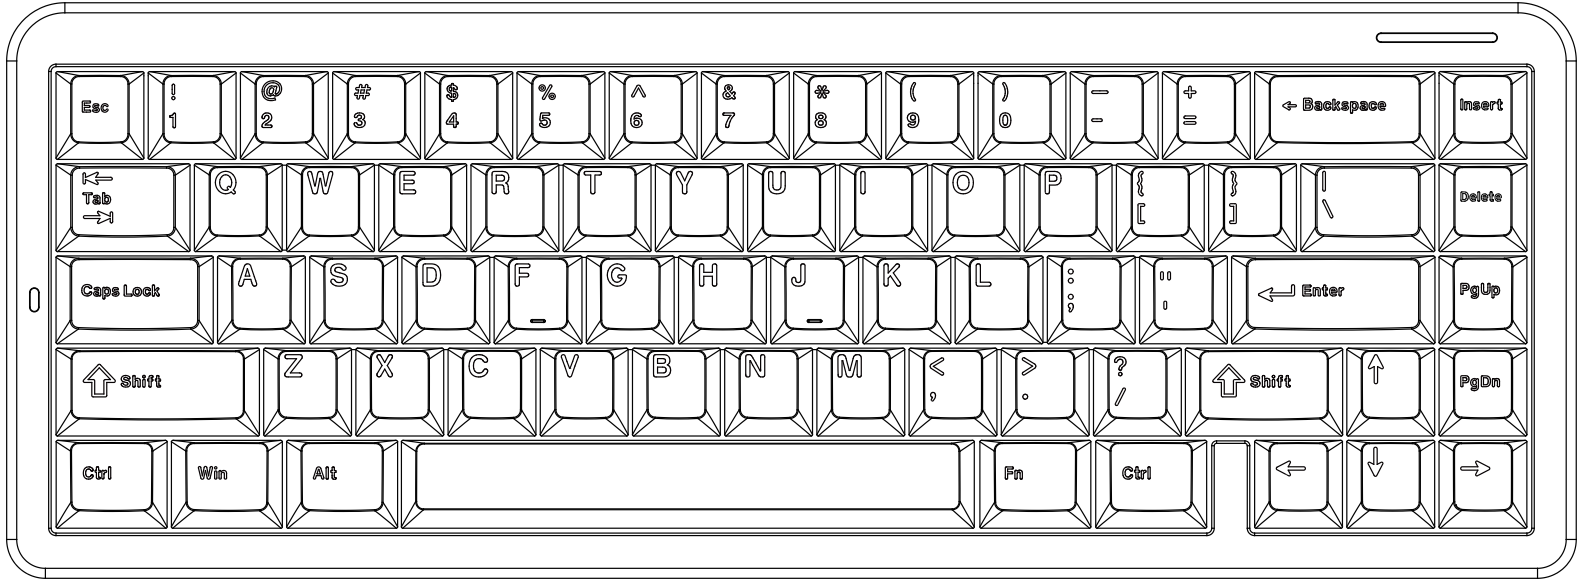


*Quick tip: Switch between 2.4G/ wired/Bluetooth modes with a toggle switch at the bottom of the Caps Lock on the left side.

*The above keycap layout is for reference only, please see the real product.

Better for MAC

Geo65: 2.4G&WIRED&BT THREE MODE

FL·CMMK

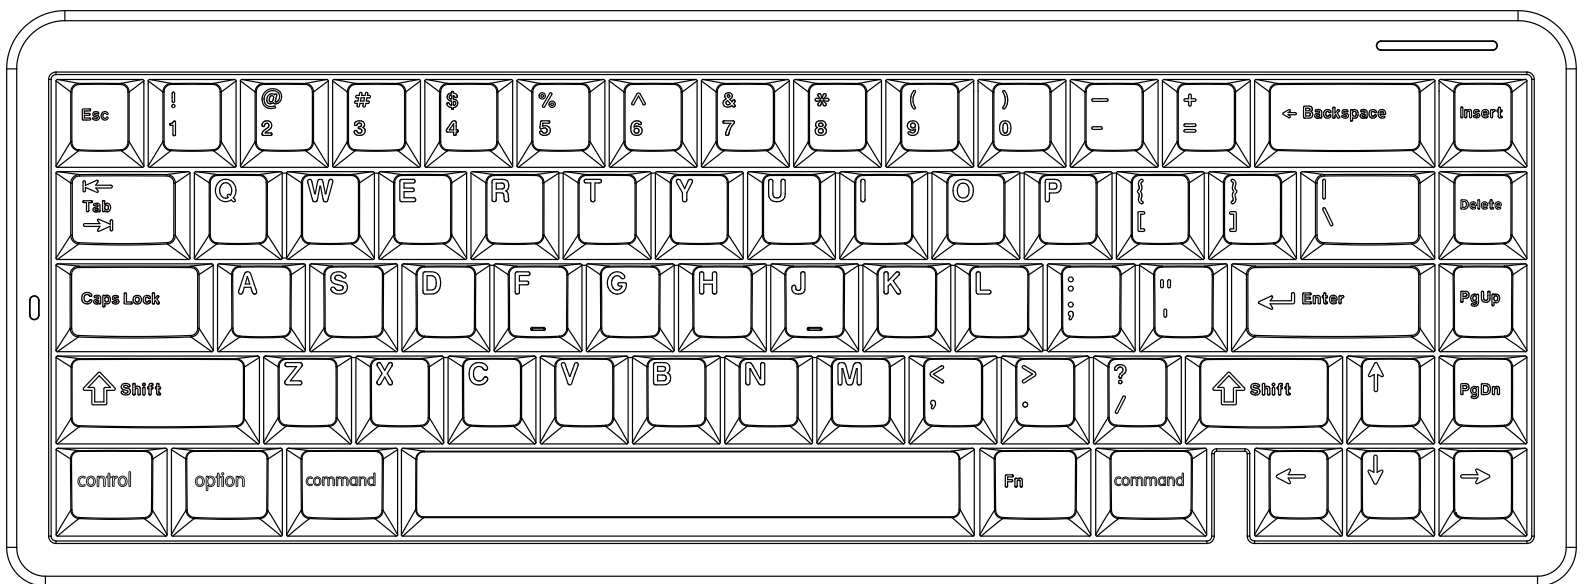

Quick tip: You can switch MAC/WIN systems using the key combination (FN+L-ALT).

*The above keycap layout is for reference only, please see the real product.

FN 组合键功能说明

Common part

按键	功能描述
FN+ESC	长按2秒恢复出厂/短按退出
FN+左WIN键	切换至左WIN（IOS、MAC系统下自动解锁）
FN+INS	-
FN+DEL	切换灯光模式
FN+PGUP	切换灯光颜色/顺序：七彩、红、橙、黄、绿、蓝、紫、白
FN+Space	直接进入常亮模式
FN+R-SHIFT	省电模式/关闭背光
FN+L-SHIFT	切换低延迟功能：长按3秒关闭灯光关闭左键进入低延迟状态m在一切一款取消此功能
Caps lock	长按3秒亮度大小切换，在0-60%亮度之间（长按3秒亮度大小切换，在0-60%亮度之间）长按3秒亮度大小切换，在0-60%亮度之间
FN+L-CTRL	长按3秒FN+L-CTRL打开/关闭宏功能，默认关闭，长按3秒FN+L-CTRL开启白光呼吸
FN+上下方向键	调整背光亮亮，向上调亮，向下调暗
FN+左右方向键	调整背光亮化速率，向左调慢，向右调快
FN+TAB	按下按键后，当前连接模式下的连接亮度亮起/熄灭，松开按键后亮度熄灭
FN+J	被控灯颜色切换
FN+I	被控灯颜色切换
FN+.	被控灯亮度+
FN+.	被控灯亮度+
FN+J	长按3秒打开/关闭 CAPS+R的灯功能
FN+BackSpace	查询电量（无线模式下电池供电有效）
FN+Q	短按切换蓝牙1，长按蓝牙配对
FN+W	短按切换蓝牙2，长按蓝牙配对
FN+E	短按切换蓝牙3，长按蓝牙配对
FN+R	长按2.4G配对
FN+Z \ X \ C	自定义灯光呼吸3
FN+V	受电，保存

Windows_Android 系统模式下

按键	功能描述
FN+1	F1 显示器亮度-
FN+2	F2 显示器亮度+
FN+3	F3 任务控制
FN+4	F4 我的电脑
FN+5	F5 邮件
FN+6	F6 主页
FN+7	F7 上一曲
FN+8	F8 播放/暂停
FN+9	F9 下一曲
FN+0	F10 静音
FN+.	F11 音量-
FN+.	F12 音量+
FN+ PGDN	转换为多媒体键功能
FN+L-ALT	长按25切换WIN/MAC
FN+U	PRINT
FN+J	SCRJK
FN+O	PAUSE
FN+K	HOME
FN+L	END

IOS_MAC 系统模式下

按键	功能描述
FN+1	F1 显示器亮度-
FN+2	F2 显示器亮度+
FN+3	F3 任务控制
FN+4	F4 呼出窗口
FN+5	F5 调节电脑键盘背光亮度-
FN+6	F6 调节电脑键盘背光亮度+
FN+7	F7 上一曲
FN+8	F8 播放/暂停
FN+9	F9 下一曲
FN+0	F10 静音
FN+.	F11 音量-
FN+.	F12 音量+
FN+ PGDN	转换为多媒体键功能
FN+L-ALT	长按25切换WIN/MAC
FN+U	PRINT
FN+J	SCRJK
FN+O	PAUSE
FN+K	HOME
FN+L	END
CTRL	control
WIN	option
ALT	command

FN combination keys manual

Common part

Keys	Function description
FN+ESC	Long press 2 seconds to restore factory/ Short press out
FN+ left WIN	Lock the left WIN (Automatically unlocked on IOS/MAC)
FN+INS	-
FN+DEL	light mode switch
FN+PGUP	Backlight color switch (Order:Colorful, red,orange,yellow,green,blue,purple,white)
FN+Space	Go straight to steady on mode
FN+R-SHIFT	Power saving mode: Turn off the backlight
FN+L-SHIFT	Switch the low delay function: long press for 3 seconds to turn off all light, and all keys enter the low delay state. Switch again to cancel the feature
caps lock	Simply press CAPS to toggle the case and set the position of the number 1 in the FN layer to F1 Press FN to become F1 Press CAPS any key to change CAPS to FN value, and then CAPS to FN+L-ALT switch again to cancel the FN function of this key
FN+L-CTRL	Press after for 3 seconds to turn on/off the deep sleep function(Default off) After the function switch the FN and L-CTRL keys will flash while three times
FN+ Up/Down	Change backlight brightness up or brightness down go darker
FN+ Left/Right	Change the backlight rate down to the left, top to the right
FN+TAB	After you hold down the button, the channel of the current connected mode lights up and other lights turn off. Release the button and restore the light effect
FN+I	Decorative light effect switch
FN+I	Decorative light color switch
FN+.	Decorative light brightness -
FN+.	Decorative light brightness +
FN+ J	Always press 3 seconds to turn CAPS+Fn on/off
FN+BackSpace	Query power (battery operated in wireless mode)
FN+Q	Short press to switch Bluetooth. Long press Bluetooth to pair
FN+W	Short press to switch Bluetooth 2 and long press Bluetooth 2 to pair
FN+E	Short press to switch Bluetooth 3 and long press Bluetooth 3 to pair
FN+R	Press and hold 2.4G to pair
FN+Z \ X \ C	Custom lighting 10/3
FN+V	Record and save

Windows_Android System model

Keys	Function description
FN+1	F1 Display brightness -
FN+2	F2 Display brightness +
FN+3	F3 Calculator
FN+4	F4 My computer
FN+5	F5 E-Mail
FN+6	F6 Home page
FN+7	F7 Previous song
FN+8	F8 Play \ pause
FN+9	F9 Next song
FN+0	F10 Sound off
FN+.	F11 Volume -
FN+.	F12 Volume +
FN+ PGDN	Convert to multimedia key function
FN+L-ALT	Hold down 2S to switch to Windows /MAC
FN+U	PRINT
FN+J	SCRJK
FN+O	PAUSE
FN+K	HOME
FN+L	END

IOS_MAC system model

Keys	Function description
FN+1	F1 Display brightness -
FN+2	F2 Display brightness +
FN+3	F3 Task control
FN+4	F4 Outgoing window
FN+5	F5 Adjust computer keyboard backlight brightness -
FN+6	F6 Adjust computer keyboard backlight brightness +
FN+7	F7 Previous song
FN+8	F8 Play \ pause
FN+9	F9 Next song
FN+0	F10 Sound off
FN+.	F11 Volume -
FN+.	F12 Volume +
FN+ PGDN	Convert to multimedia key function
FN+L-ALT	Hold down 2S to switch to Windows /MAC
FN+U	PRINT
FN+J	SCRJK
FN+O	PAUSE
FN+K	HOME
FN+L	END
CTRL	control
WIN	option
ALT	command

2.4G \ 有线 \ 蓝牙模式指示灯说明

2.4G模式:

拨动开关切换到2.4G模式，如需重新配对接收器，常按FN+R组合键，搜索接收器，连接成功后设备常亮3秒后熄灭，找不到配对接收器40s后，退出配对。键盘回连时间为10秒回连失败，键盘进入睡眠，回连成功时，指示灯常亮3秒后熄灭，不使用键盘的情况下120秒后关闭背光灯，10分钟后键盘进入睡眠。

有线模式:

拨动开关切换到有线模式时，CAPS 指示灯白光闪烁3次后恢复原来状态

蓝牙模式:

拨动开关切换到蓝牙模式，蓝牙连接组合键为Q/W/E 这三个按键。FN+Q/W/E 长按3秒为广播，单独短按为切换蓝牙设备，按组合键3S进入配对状态后，配对成功后充电模式灯常亮3秒后熄灭，找不到配对设备60秒后，退出配对，回连失败指示灯熄灭，键盘进入睡眠。键盘回连成功时，指示灯常亮3秒后熄灭，不使用键盘的情况下120秒后关闭背光灯，10分钟后键盘进入睡眠。

蓝牙设备1、2、3对应颜色如下:

- (a) 蓝牙1-蓝光 (B:255 G:0) 对应蓝牙名称: Geo65 BT5.0 KB1
- (b) 蓝牙2-浅蓝 (B:255 G:125) 对应蓝牙名称: Geo65 BT5.0 KB2
- (c) 蓝牙3-冰蓝 (B:255 G:255) 对应蓝牙名称: Geo65 BT5.0 KB3

充电模式:

当插上USB线后，充电指示灯红色常亮，表示正在充电，当电压达到4.2v时指示灯熄灭，提示电已充满。不论拨动开关是否打开，当插上USB线时都能够充电。

低压模式:

当电量等于小于20%时，充电指示灯以红色闪烁的方式提示用户进行充电（注：当电池电压低于3.2V时，键盘就直接停止工作，且不可以唤醒。此时敲击按键时键盘就只有充电指示灯闪烁提示，其他无反应，一定要插上USB线充电到3.2V以上才可以唤醒正常工作。）

注意事项:

- 1.连接设备时，要注意观察对码指示灯，一定是在指示灯闪烁的情况，设备才能搜索蓝牙键盘，如果是常亮的状态，代表键盘处于回连状态（此时设备是无法搜索键盘的），要再长按一下对码组合键（FN+Q或W或E），看到指示灯闪烁后才松开，此时设备就可以正常搜索到蓝牙键盘了。
- 2.特别注意：键盘工作电压为DC 5V，因此禁止使用高于5V的电源适配器去给键盘充电，否则会导致元件导致键盘不能正常工作！

产品参数

产品类型: Geo65 RGB 双系统三模机械键盘
产品尺寸: 325.5mm (L) x 121.7mm (W) x 46.6mm (H)
按键数量: 67键
键盘功能: 全键无冲突
工作电压: 5V
连接方式: TYPE-C
续航: 1.6m
键盘接口: USB

制造商: 东莞市展翼科技电子有限公司
产地: 广东省东莞市石龙镇王屋工业区B栋
网址: www.flesports.com
www.flesportsglobal.com



展翼官网

可用驱动软件重新定义属于你自己的按键功能和组合功能，背光灯效也可更新下载。



驱动程序官方下载网址: www.flesports.com

2.4G \ wired \ Bluetooth mode indicator

2.4G mode:

Pull the switch to switch to 2.4G mode, if you need to re-pair the receiver, often press FN+R key combination, search the receiver, connect!After success, the green light will be on for 3 seconds and then off. After 60s, the matching receiver cannot be found, exit the matching code, and the keyboard connection time is 10 seconds. The call back failed and the keyboard went to sleep. After the connection is successful, the indicator is on for 3 seconds and then off. After 120 seconds, turn off the backlight and 10 minutes the keyboard goes to sleep.

Wired mode:

When the switch is switched to the wired mode, the CAPS indicator blinks white for three times and then returns to the original state

BT mode:

Pull the switch to switch to Bluetooth mode, Bluetooth connection key combination Q/W/E these three keys. FN+Q/W/E Hold down for 3 seconds To switch Bluetooth devices, press the key combination 3S to enter the pairing state, and the charging mode will turn on after the pairing is successful Turn off after 3 seconds, can not find the matching device 60 seconds later, exit the pairing, back connection failure indicator off, keyboard into sleep. After the keyboard is connected back successfully, the indicator light will be on for 3 seconds and then off. If the keyboard is not used, the backlight will be off after 120 seconds. After 10 minutes the keyboard goes to sleep. Bluetooth devices 1, 2 and 3 correspond to the following colors:
(a) Bluetooth 1-Blue (B:255 G:0) corresponding Bluetooth name: Geo65 BT5.0KB1
(b) Bluetooth 2: Light blue (B:255 G:125) corresponding Bluetooth name: Geo65 BT5.0KB2
(c) Bluetooth 3-ice blue (B:255 G:255) corresponding Bluetooth name: Geo65 BT5.0KB3

Charging mode:

When the USB cable is plugged in, it means in charging if the indicator light shows in red and it will be off after the voltage reach 4.2V, which means the power has been fully charged. When you plug in the USB cable, it charges whether the bottom toggle switch is on or not.

Low power mode:

When the power is less than 20%, the charging indicator will alternately flash red to prompt the user to charge. (Note: When the battery voltage is lower than 3.2V, the keyboard will stop working directly, and can not wake up. At this time, when the key is hit, the keyboard will only have the charging indicator flashing, and no other response. Be sure to plug in the USB cable to charge to 3.2V above so keyboard could be waked up.)

Matters Need Attention:

1. When connecting the device, pay attention to observe the code indicator light, it must be in the case that the indicator light flashes quickly, the device can search the Bluetooth keyboard, if it is in the state of slow blinking, it means that the keyboard is in the state of connecting back (at this time the device cannot search the keyboard), long press the code combination key (FN+Q or W or E) and release it after seeing the indicator light flashes quickly. At this time, the device can normally search for the Bluetooth keyboard
2. Note: The operating voltage of the keyboard is DC 5V, so do not use the power adapter higher than 5V to charge the keyboard, otherwise it will burn out the components and cause the keyboard to not work properly.

Product Spec Data


Product Type: Geo65 RGB dual system three mode mechanical keyboard
Product Size: 325.5mm (L) x 121.7mm (W) x 46.6mm (H)
Total key number: 67 keys
Keyboard function: All keys anti-ghosting
Working voltage: 5V
Cable connector type: TYPE-C
Switch lifespan: :50 millions
Conduction Travel: 15mm-24mm
Cable length: 1.6 meters
Keyboard connector type: USB2.0

Manufacturer: DONGGUAN FL ESPORTS ELECTRONICS CO.,LTD.
Address: Building B,Wangwuzhou Industrial Zone,Shilong Town, Dongguan City,Guangdong,China
Website: www.flesports.com
Global Website: www.flesportsglobal.com



Official Website

The software can be redefined with your own button functions and combinations, and backlight effects can be updated and downloaded.

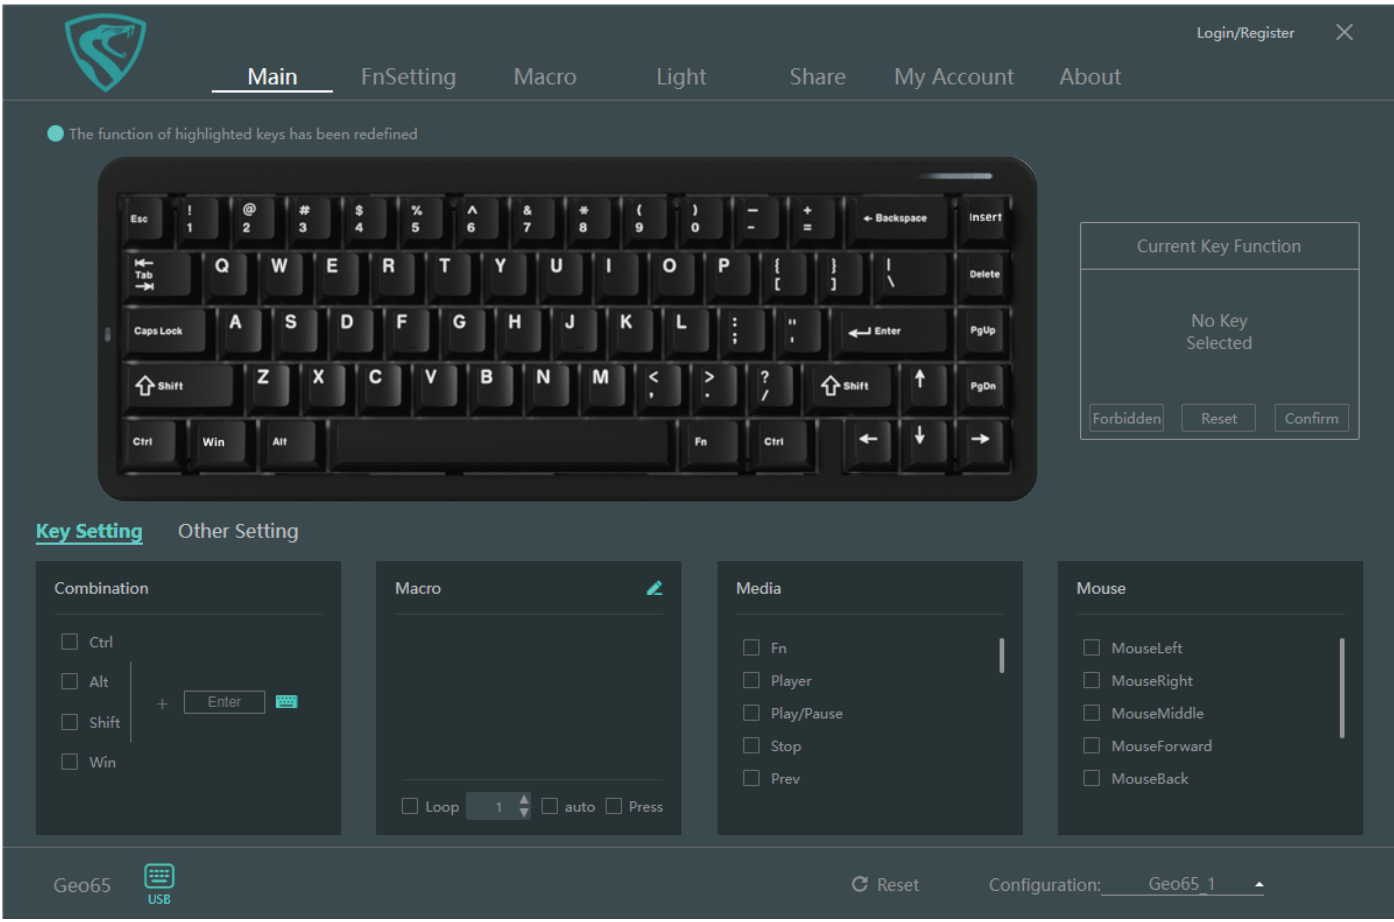

Software official download website: www.flesports.com