


WIN 模式

MK 100 : 2.4G&有线&蓝牙 三模版

FL·CMMK

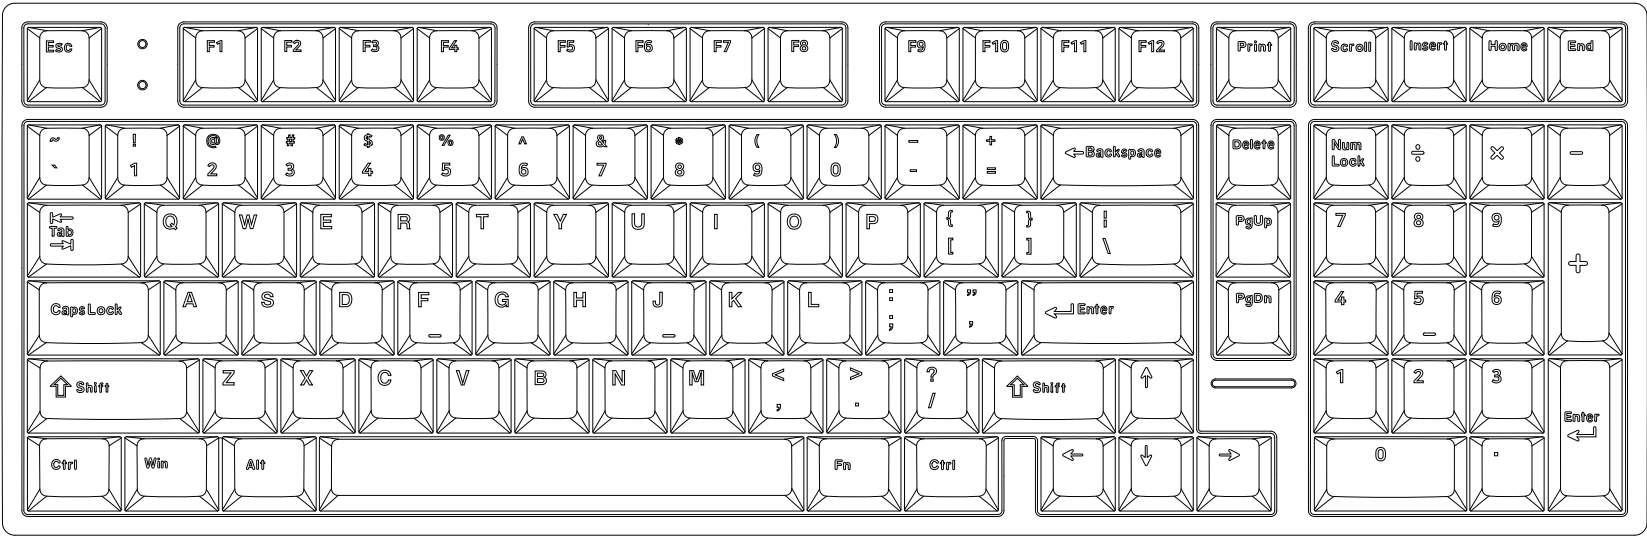


*妙用小技巧：可通过背面拨动开关，快速进行2.4G/有线/蓝牙 模式切换。

*以上键帽字符和图案仅供参考，请以实物为准。

Better for WIN

MK 100 : 2.4G&WIRED&BT THREE MODE

FL·CMMK

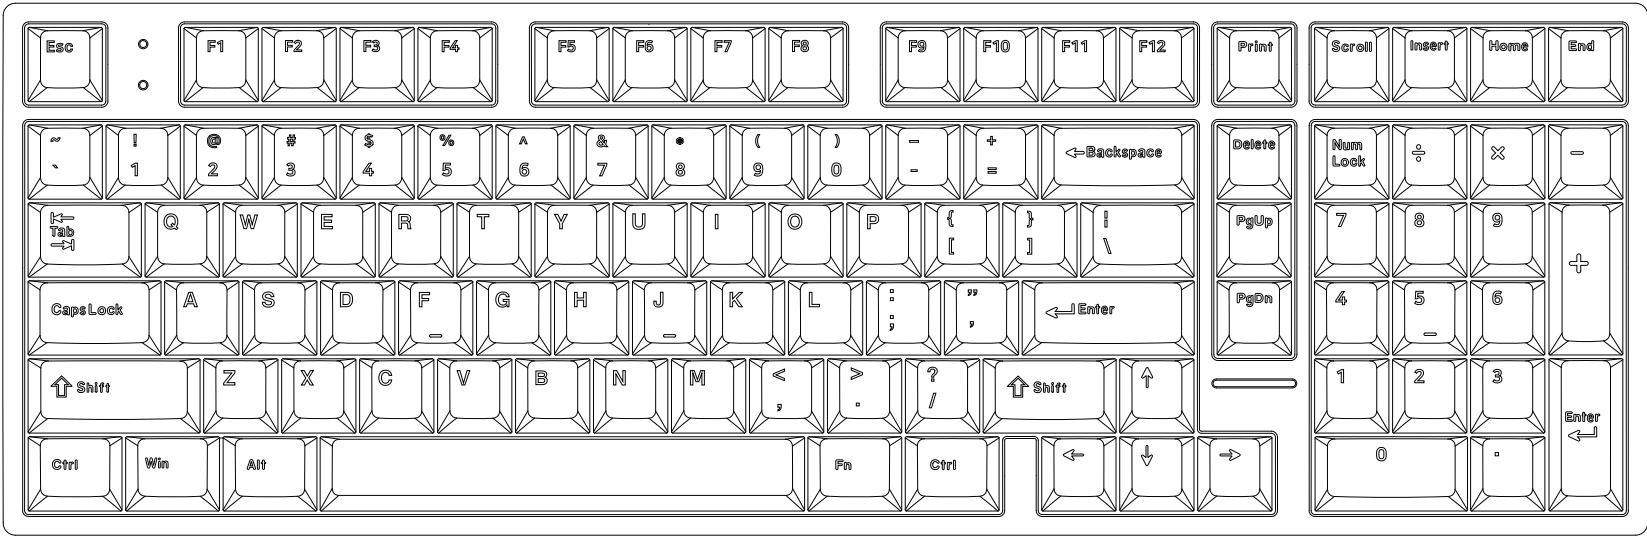


* Tips: You can toggle the switch on the back to quickly switch the 2.4G/ wired/Bluetooth mode.

*The above keycap layout is for reference only, please see the real product.

MAC 模式

MK100 : 2.4G&有线&蓝牙 三模版

FL·CMMK

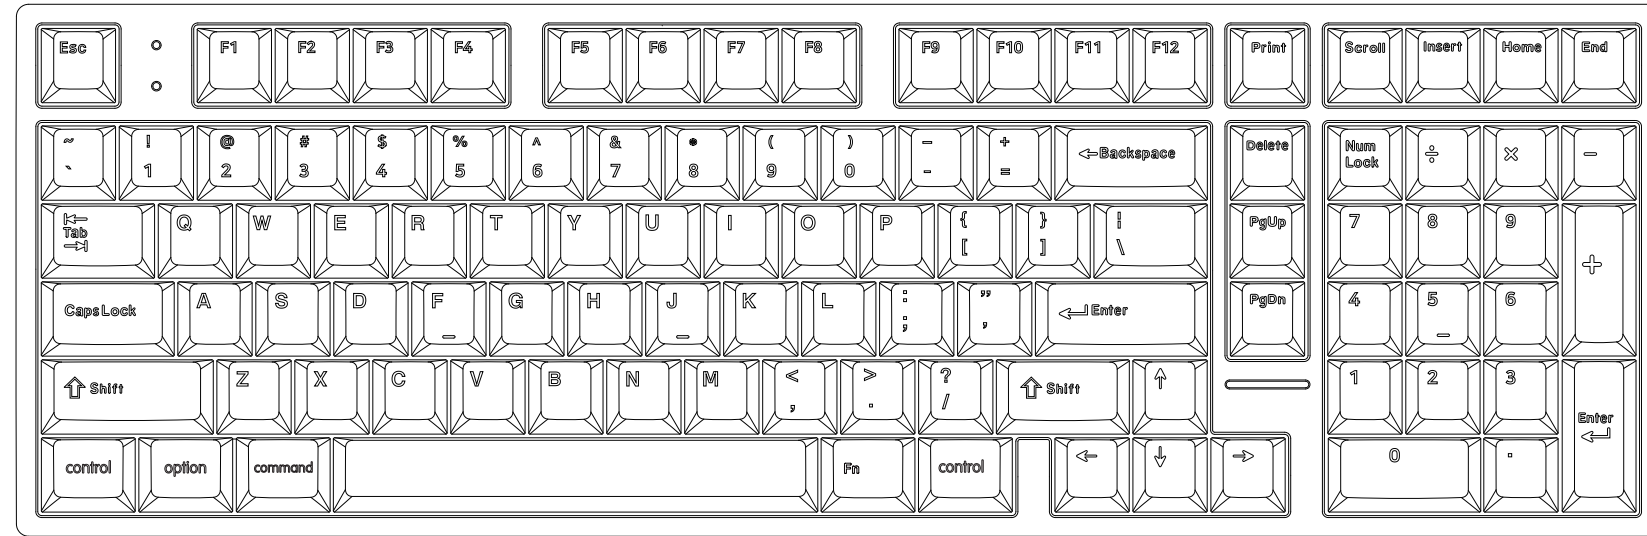


*妙用小技巧：可通过组合键（FN+~）进行MAC/WIN系统切换。

*以上键帽字符和图案仅供参考，请以实物为准。

Better for MAC

MK 100 : 2.4G&WIRED&BT THREE MODE

FL·CMMK

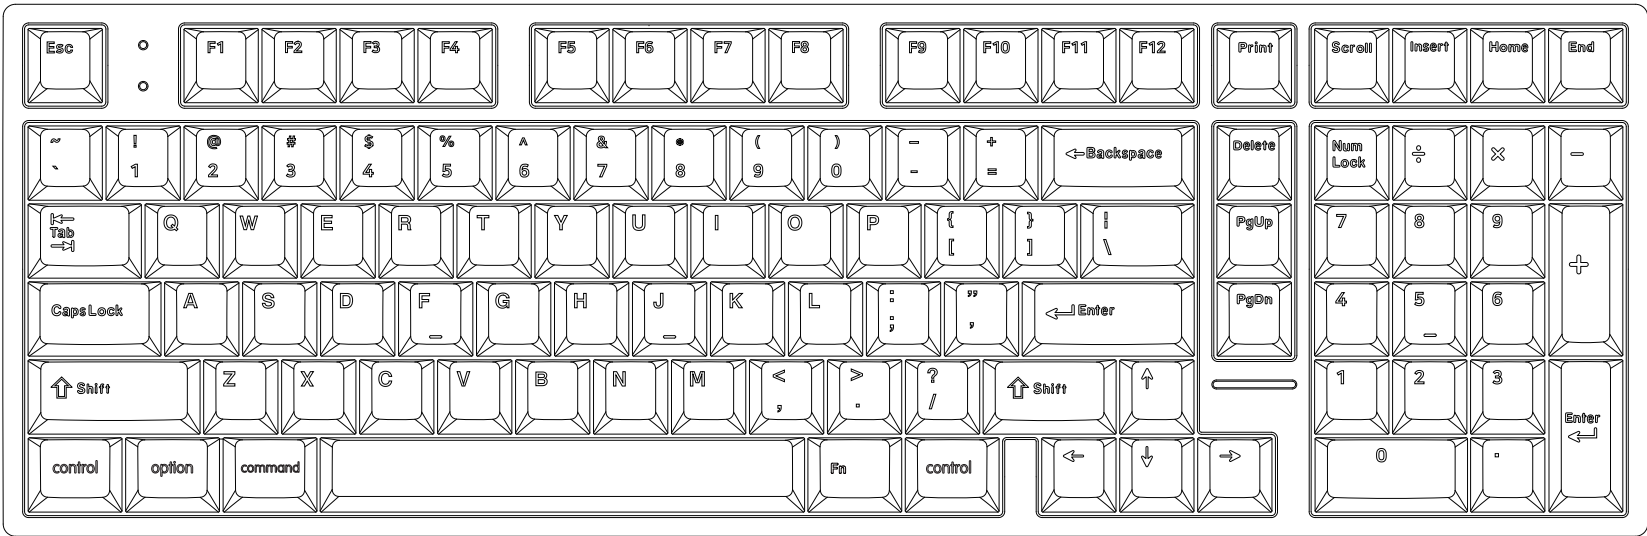

*Quick tip: You can switch MAC/WIN systems with the key combination (FN+ ~).

*The above keycap layout is for reference only, please see the real product.

FN 组合键功能说明

共用部分

按 键	功 能 描 述
FN+ESC	长按2秒恢复出厂
FN+左WIN键	切换至左WIN (IOS、MAC系统下自动解锁)
FN+~	长按2秒切换 Win/Mac系统
FN+PRINT	切换灯光颜色(默认光波)
FN+SCROLL	切换背光颜色顺序：七彩、红、橙、黄、绿、青、蓝、紫、白
FN+DEL	直接进入常亮模式
FN+END	省电模式 关闭背光
FN+SHIFT	切换低延迟功能。长按3秒全部灯光关闭，全键进入低延迟状态。再按一次返回此功能
Caps	单击caps键是大小写切换。长按caps键的功能是在caps键+左键功能键可以设置。再按一次返回此键功能。在mac模式下禁用此功能 默认3次提示
FN+L-CTRL	长按3S 打开/关闭宏功能。默认关闭功能切换后在FN+L-CTRL亮白光三次
FN+上下方向键	调整背光亮度。向上/向下。向下键（默认灯为关闭）（最大亮度时向上/下无反应需白色背光3次提示）
FN+左右方向键	调整背光色温。向左/向右。向右键（最大亮度时上下左右无反应需白色背光3次提示）
FN+TAB	按下按键后，当前连接模式灯快速亮起并熄灭。松开按键后恢复正常灯光
FN+INS	被指示灯颜色切换（默认光波）
FN+HOME	被指示灯颜色切换
FN+PGDN	被指示灯亮度+
FN+PGUP	被指示灯亮度-
FN+I	长按3秒打开/关闭 CAPS+FN的功能
FN+BackSpace	省电电量（无线模式下电筒省电效果）
FN+1	短按切换蓝牙1。长按蓝牙配对
FN+2	短按切换蓝牙2。长按蓝牙配对
FN+3	短按切换蓝牙3。长按蓝牙配对
FN+4	长按4配键
FN+Z \ X \ C	自定义灯光灯效2/3
FN+V	录制、保存

Windows_Android 系统模式下

按 键	功 能 描 述
FN+F1	显示器亮度-
FN+F2	显示器亮度+
FN+F3	计算器
FN+F4	我的电脑
FN+F5	邮件
FN+F6	主页
FN+F7	上一曲
FN+F8	播放/暂停
FN+F9	下一曲
FN+10	静音
FN+11	音量-
FN+12	音量+
FN+O	PAUSE

IOS_MAC 系统模式下

按 键	功 能 描 述
F1	显示器亮度-
F2	显示器亮度+
F3	任务控制
F4	呼出窗口
F5	调节 电脑键盘背光亮度-
F6	调节 电脑键盘背光亮度+
F7	上一曲
F8	播放/暂停
F9	下一曲
F10	静音
F11	音量-
F12	音量+
FN+O	PAUSE
CTRL	control
WIN	option
ALT	command

2.4G\有线\蓝牙模式指示灯说明

2.4G模式:

拨动开关切换到2.4G模式，如需重新配对接收器，常按FN+4组合键，相对应指示灯快闪（3次/秒）搜索接收器，连接成功后绿色常亮3秒后熄灭，找不到配对接收器60s后，退出对码，键盘回连时间为10秒相对应指示灯快闪，回连失败相对应指示灯熄灭，键盘进入睡眠。回连成功后，相对应指示灯常亮3秒后熄灭，不使用键盘的情况下120秒后关闭背光灯，10分钟后键盘进入睡眠。

有线模式:

拨动开关切换到有线模式时，“5”数字键白光闪烁3次后恢复原来状态

蓝牙模式:

拨动开关切换到蓝牙模式，蓝牙连接组合键为1/2/3这三个按键。FN+1/2/3 长按3秒为广播，单独短按为切换蓝牙设备，按组合键3S进入配对状态后，（对应蓝牙设备123颜色）快闪（3次/秒），配对成功相对应灯常亮3秒后熄灭，找不到配对设备60秒后退出配对。键盘回连时间为10秒相对应灯快闪，回连失败指示灯熄灭，键盘进入睡眠。键盘回连成功后相对应灯常亮3秒后熄灭，不使用键盘的情况下120秒后关闭背光灯，10分钟后键盘进入睡眠。

蓝牙设备1、2、3对应颜色如下:

- (a) 蓝牙1-蓝光 (B:255 G:0) 对应蓝牙名称: MK100 BT5.0 KB1
- (b) 蓝牙2-浅蓝 (B:255 G:125) 对应蓝牙名称: MK100 BT5.0 KB2
- (c) 蓝牙3-深蓝 (B:255 G:255) 对应蓝牙名称: MK100 BT5.0 KB3

充电模式:

当插上USB线后，充电指示灯红色常亮，表示正在充电，当电压达到4.2V时指示灯熄灭，提示充电已满。不论拨动开关是否打开，当插上USB线时都能够充电。

低压模式:

当电量等于小于20%时，充电指示灯以红色闪烁的方式提示用户进行充电（注：当电池电压低于3.2V后，键盘就直接停止工作，且不可以唤醒。此时敲击按键时键盘就只有充电指示灯闪烁提示，其他无反应，一定要插上USB线充电到3.2V以上才可以恢复正常工作。）

注意事项:

- 1.连接设备时，要注意观察对码指示灯，一定是在指示灯快闪的情况，设备才能搜索蓝牙键盘，如果是慢闪的状态，代表键盘处于回连状态（此时设备是无法搜索键盘的），要再长按一下对码组合键（FN+1或2或3），看到指示灯快闪后才松开，此时设备就可以正常搜索到蓝牙键盘了。
- 2.特别注意：键盘工作电压为DC 5V，因此禁止使用高于5V的电源适配器去给键盘充电，否则会烧坏元件导致键盘不能正常工作！

产品参数

产品类型: MK100 RGB 双系统三模机械键盘
产品尺寸: 410mm (L) x 138.6mm (W) x 41.5mm (H)
按键数量: 101键 按键寿命: 超过5000万次
键盘功能: 全键无冲突 触发键程: 1.5~2.4mm
工作电压: 5V 线长: 1.6米
连接方式: TYPE-C 键盘接口: USB



康翼官网

制造商: 东莞市康翼竞技电子有限公司
产地: 广东省东莞市石龙镇玉皇洲工业区B栋
网址: www.flesports.com

2.4G\ wired \ Bluetooth mode indicator

2.4G mode:

Pull the switch to switch to 2.4G mode. If you need to re-pair the receiver, frequently press the FN+4 key combination. The corresponding light will flash green (3 times per second) to search for the receiver. After a successful connection, the green light will be on for 3 seconds and then turn off. If the paired receiver cannot be found after 60 seconds, the process will exit. If the keyboard connection time is 10 seconds, the green light will blink slowly. If the connection fails, the light will turn off and the keyboard will enter sleep mode. After a successful pairing, the corresponding green light will be on for 3 seconds and then turn off. If the keyboard is not used, the backlight will turn off after 120 seconds. The keyboard will enter sleep mode after 10 minutes.

Wired mode:

When the switch is switched to the wired mode, the white light of the "5" digital key flashes 3 times and returns to the original state

BT mode:

Pull the switch to switch to Bluetooth mode. The Bluetooth connection combination key is 1, 2, 3. Press and hold FN + 1 2 3 for 3 seconds. To broadcast, press separately to switch Bluetooth devices. Press the combination key for 3 seconds to enter the pairing state (corresponding to Bluetooth devices 1, 2, 3 Color). It blinks quickly (3 times/second). The corresponding light will remain steady for 3 seconds after a successful pairing. If no matching device is found within 60 seconds. If the keyboard connection time is 10 seconds, the corresponding light blinks slowly. The failure indicator is off, and the keyboard goes to sleep. Once the keyboard is connected successfully again, the corresponding light will be on for 3 seconds and then off. If the keyboard is not used, the backlight will be turned off after 120 seconds. The keyboard goes to sleep after 10 minutes.

Bluetooth devices 1, 2 and 3 correspond to the following colors:

- (a) Bluetooth 1-Blue-ray (B:255 G:0) corresponding Bluetooth name: MK100 BT5.0 KB1
- (b) Bluetooth 2- Light blue (B:255 G:125) corresponding Bluetooth name: MK100 BT5.0 KB1
- (c) Bluetooth 3-Ice blue (B:255 G:255) corresponding Bluetooth name: MK100 BT5.0 KB1

Charging mode:

When the USB cable is plugged in, it means in charging if the indicator light shows in red and it will be off after the voltage reach 4.2V, which means the power has been fully charged. When you plug in the USB cable, it charges whether the bottom toggle switch is on or not.

Low power mode:

When the power is less than 20%, the charging indicator will alternately flash-red to prompt the user to charge. (Note: When the battery voltage is lower than 3.2V, the keyboard will stop working directly and can not wake up. At this time, when the key is hit, the keyboard will only have the charging indicator flashing, and no other response. Be sure to plug in the USB cable to charge to 3.2V above so keyboard could be waked up.)

Matters Need Attention:

1. When connecting the device, pay attention to observe the color indicator light, it must be in the case that the indicator light flashes quickly, the device can search the Bluetooth keyboard, if it is in the state of slow blinking, it means that the keyboard is in the state of connecting back (at this time the device cannot search the keyboard), long press the code combination key (FN+1 or 2 or 3), and release it after seeing the indicator light flashes quickly. At this time, the device can normally search for the Bluetooth keyboard.
2. Note: The operating voltage of the keyboard is DC 5V, so do not use the power adapter higher than 5V to charge the keyboard, otherwise it will burn out the components and cause the keyboard to not work properly.

Product Spec Data

Product Type: MK 100 RGB dual system three mode mechanical keyboard
Product Size: 410mm (L) x 138.6mm (W) x 41.5mm (H)
Total key number: 101 keys Switch lifespan: >50 millions
Keyboard function: All keys anti-ghosting Conduction Travel: 1.5mm~2.4mm
Working voltage: 5V Cable length: 1.6 meters
Cable connector type: TYPE-C Keyboard connector type: USB2.0

Manufacturer: DONGGUAN FL ESPORTS ELECTRONICS CO.,LTD.
Address: Building B,Wangwuzhou Industrial Zone,Shilong Town,
Dongguan City,Guangdong,China
Website: www.flesports.com.




Official Website

可用驱动软件重新定义属于你自己的按键功能和组合功能，背光灯效也可更新下载。



驱动程序官方下载网址: www.flesports.com

The software can be redefined by your own button functions and combinations, and backlight effects can be updated and downloaded.

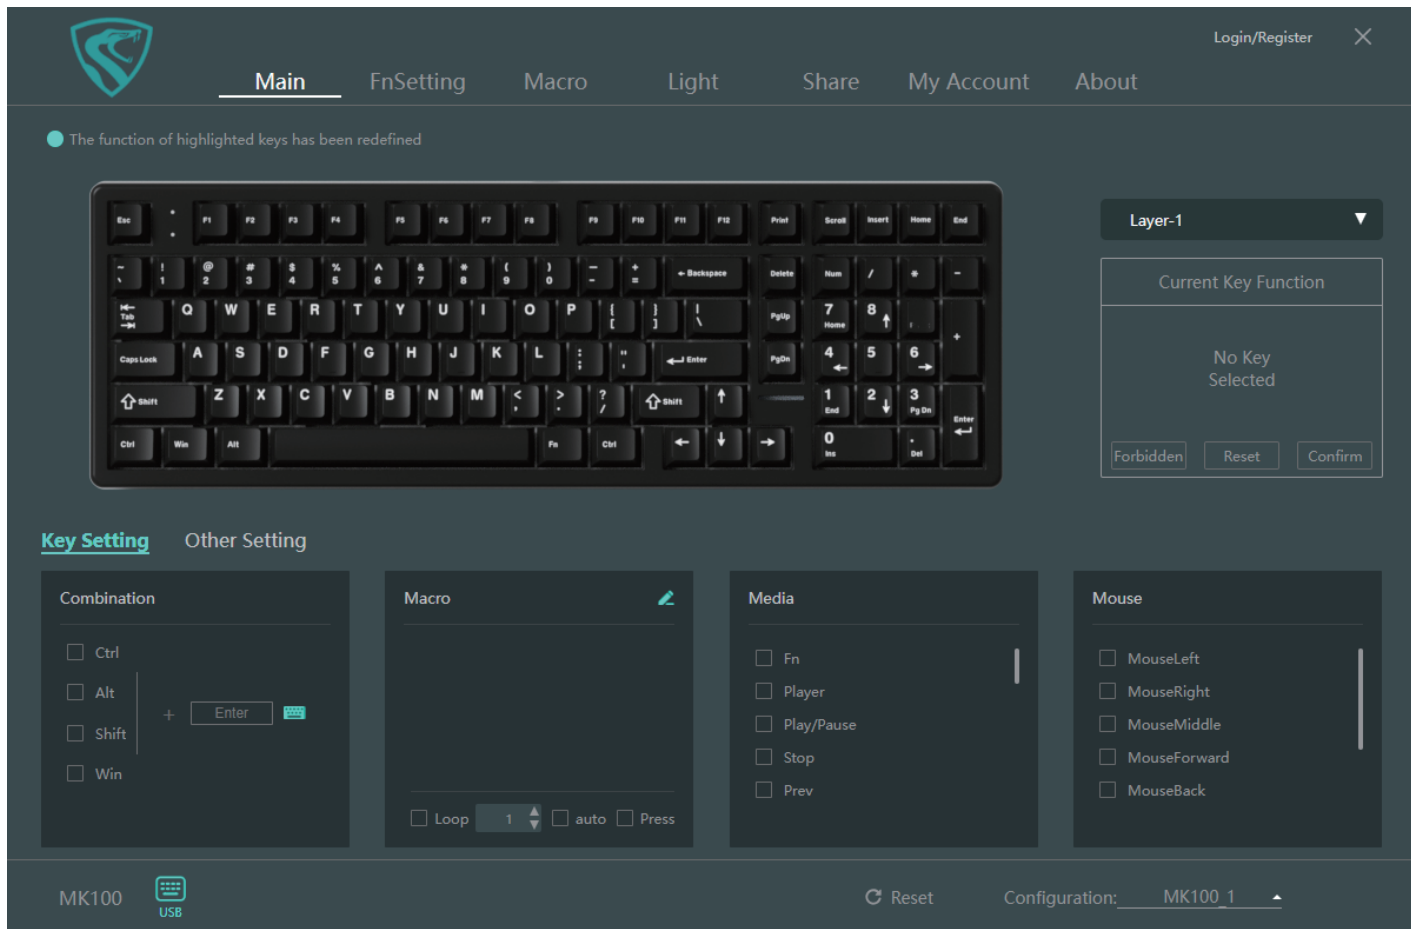

Software official download website: www.flesports.com